




JETT WATER HEATER CO., INC.

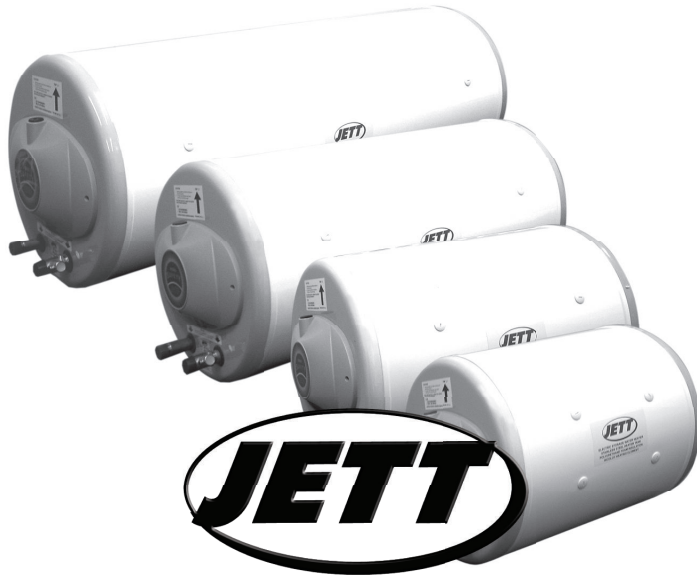

STORAGE WATER HEATER (Horizontal Design)

Jett Electric Storage Water Heater is built for high performance and extra durability. Operates at both high and low water pressure. Capable of supplying hot water to one or more outlets.

STANDARD FEATURES:

- Double Safety System
 - Pressure Relief Valve
 - Thermostat Control with Auto Overload Temperature Control
- Stainless Steel Inner Tank
- Incoloy Heating Element
- High Density Polyurethane Foam Insulation

TECHNICAL SPECIFICATION

MODEL	JETT 15L-H	JETT 25L-H	JETT 35L-H	JETT 50L-H	JETT 68L-H
CAPACITY US Gals.	4	7	9	13	18
CAPACITY Liters	15	25	35	50	68
HEIGHT mm	370	370	370	370	370
LENGTH mm	357	476	596	778	996
WEIGHT Empty Kgs.	10	12	14	17	20
WEIGHT Full Kgs.	25	37	49	67	88
CONNECTIONS	SIDE	SIDE	SIDE	SIDE	SIDE
INLET / OUTLET SIZE	1/2 / 15 mm	1/2 / 15 mm	1/2 / 15 mm	1/2 / 15 mm	1/2 / 15 mm
VOLTAGE	2 2 0 - 2 4 0 V A C				
WATTAGE	3 Kw	3 Kw	3 Kw	3 Kw	3 Kw
CYCLE	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
PHASE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
CIRCUIT BREAKER RATING	30 Amps	30 Amps	30 Amps	30 Amps	30 Amps
TEMPERATURE CONTROL :					
THERMOSTATICALLY CONTROLLED	70 °C	70 °C	70 °C	70 °C	70 °C
SAFETY CUT-OUT	95 °C ± 10%	95 °C ± 10%	95 °C ± 10%	95 °C ± 10%	95 °C ± 10%
HEATING TIME (28 °C - 70 °C) 3 Kw	14 mins	25 mins	33 mins	48 mins	66 mins
RECOVERY AT 20 °C RISE	129 LPH	129 LPH	129 LPH	129 LPH	129 LPH
RECOVERY AT 30 °C RISE	86 LPH	86 LPH	86 LPH	86 LPH	86 LPH
RECOVERY AT 40 °C RISE	64 LPH	64 LPH	64 LPH	64 LPH	64 LPH

JETT Water Heater Co., Inc.

Trunklines: 723 - 0032 to 37

Fax: 724 - 5907

www.jettwaterheater.com

*Bracket included for FREE